

Life Is On

Schneider
Electric

Schneider Electric Handbook for Solar Installers

UL Standards

Solar products and tech
notes for residential and
commercial applications



solar.schneider-electric.com



Table of Contents

About Schneider Electric Solar	1
Hybrid inverter and charge controller solutions	2
Energy management	3
Balance of systems	4
System Configurations / Bill of Materials	5
Tech notes	6
Li-ion compatibility	7
NEC 2017 compliance	8

Smarter investment in PV solutions for grid-tie, off-grid and backup power installations

1



When it comes to grid-tie, off-grid and backup power residential and commercial solar systems, Schneider Electric has both the experience and the proven technology to help make your investment a success.

Schneider Electric solutions for residential and commercial installations are specially designed by keeping your needs in mind. Our balance-of-system solutions include everything you need to efficiently distribute and manage locally generated solar energy, from the DC output to the AC grid connection.

Schneider Electric: the global specialist in energy management and automation

Schneider Electric provides energy and automation digital solutions for efficiency and sustainability. We combine world-leading energy technologies, real-time automation, software and services into integrated solutions for homes, buildings, data centers, infrastructure and industries. For more information about Schneider Electric, please visit our global website at www.se.com/www/en/about-us/company-profile/.



5%
of revenue
devoted to R&D



27.2 billion
2019 revenue



41%
of revenues in new
economies



135,000+
employees in over
100 countries

Why choose Schneider Electric's solar products and solutions?



Trusted brand for over 180 years



Designed for reliability



Flexibility



Schneider Electric's ecosystem of products and solutions



Long-term, trusted service partner




IoT enabled solutions for Smart Homes and Buildings

Our journey of Solar Energy Management

Enabling the future of solar power conversion since the mid-1970s, Schneider Electric Solar has continuously designed and developed solar products and solutions to empower all.

1

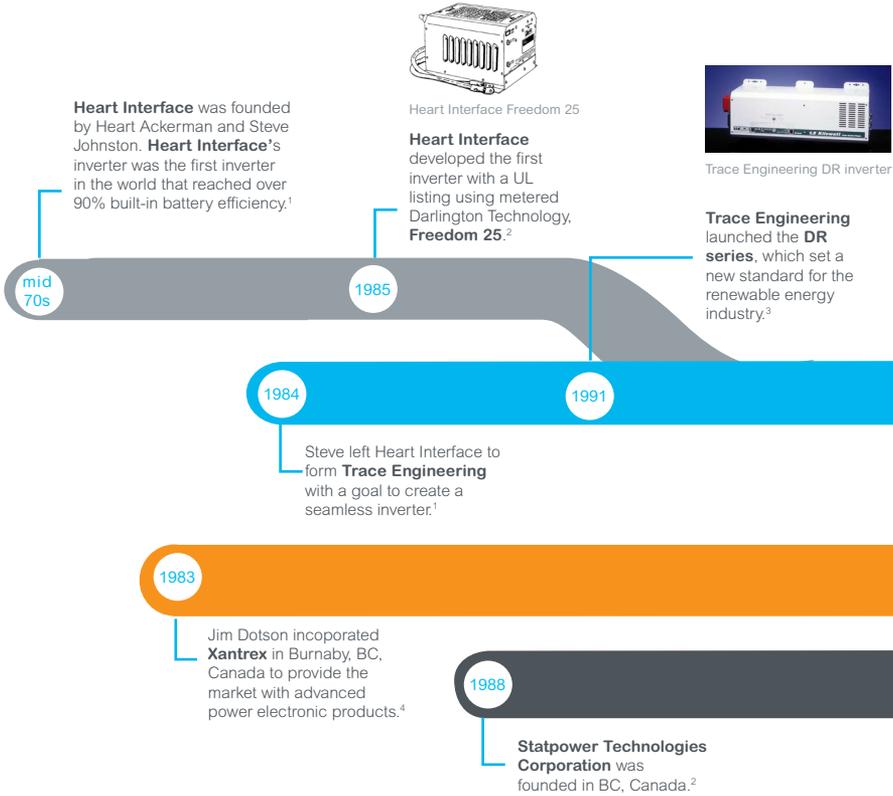



Trace Engineering SW4024 inverter

Trace Engineering developed and patented modified sine wave technology into their **SW series**. This development brought efficiency and established Trace Engineering's success in the global market. They had become so well-known that "Trace" became the word for inverter in South America.²

1993

Xantrex acquired Trace Engineering.

1999

2000

Xantrex acquired Statpower Technologies Corporation.⁴

1995

Statpower Technologies Corporation introduced the first pure sine wave inverter, **PROsine Wave 25**. This inverter marked a technological milestone as its charger had reached almost 100% efficiency.²



Statpower PROsine 25 Inverter

2008

Schneider Electric acquired Xantrex

1. Robin Gudel, "History of Northwest Off-grid Inverter Companies", MidniteSolar, <https://www.midnitesolar.com/pages/frontPage/nwHistory/history.php>
 2. Ed Gurdjian & Carol Maxwell, "Inverter History", RV Tech Stop, March, 2000, <http://www.rvtechstop.com/resources/Articles/Invhist-s.pdf>
 3. <http://www.getoffthegrid.com/drttrace.html>
 4. <https://www.owler.com/company/xantrex>

Hybrid inverter systems for residential and commercial applications

XW Pro and SW inverters



Our hybrid inverters manage power conversion and battery charging. The XW Pro and SW inverters are suitable for grid-tie solar with storage, backup power, self-consumption, and off-grid power for homes, small businesses, and remote communities.

2

Residential applications



Residential grid-tie solar with battery backup



Residential self-consumption with storage



Residential off-grid



Residential backup power

Commercial applications



Commercial rooftop solar for self-consumption with storage



Commercial backup power



Commercial off-grid



Microgrids



Telecom towers

Hybrid inverter systems

XW Pro

Adaptable and scalable, the XW Pro storage inverter provides the one solution you need for grid-tie solar with storage, backup power, self-consumption, and off-grid for homes, small businesses and remote communities.

Designed to the highest standards of reliability and quality while complying with evolving utility requirements such as California Rule 21 and UL 1741 SA, XW Pro can meet your needs for any number of residential, commercial, and industrial applications.

2

	Part number	Product name	Description
	865-6848-21	XW Pro 120/240V	<ul style="list-style-type: none"> • 6800 W output power (continuous) at 25°C • 12000 W overload 60 sec • 140 A maximum output charge current • 48 VDC nominal battery voltage

SW

SW is a pure sine wave, storage inverter / charger with switchable 50/60 Hz frequencies, providing power for every need.

The SW is a proven inverter / charger for off-grid, backup power and self-consumption applications for homes and small businesses.

	Part number	Product name	Description
	865-4024-21	SW 4024 120/240V	<ul style="list-style-type: none"> • 4000 W overload 30 min • 7000 W overload 5 sec • 90 A maximum output charge current • 24 VDC nominal battery voltage
	865-4048-21	SW 4048 120/240V	<ul style="list-style-type: none"> • 4400 W overload 30 min • 7000 W overload 5 sec • 45 A maximum output charge current • 48 VDC nominal battery voltage

Charge Controller Solutions

Conext™ MPPT charge controller solutions

Conext™ MPPT charge controllers are used for DC Coupled systems.

The Conext™ MPPT charge controllers provide maximum power point tracking of PV arrays to optimize solar energy harvest while regulating the battery charge. When combined with the XW and SW series inverters, surplus power is used to power AC loads. The MPPT 80 600 is rated for 600 V PV strings, helping to reduce balance of system costs.

2

	Part number	Product name	Description
	865-1030-1	Conext™ MPPT 60 150 Charge Controller	<ul style="list-style-type: none"> • 3500 W maximum output power (48 V systems) • 12, 24, 36, 48, 60 V nominal battery voltage • 150 V max. PV array open circuit voltage • Compatible with XW Pro and SW
	865-1032	Conext™ MPPT 80 600 Charge Controller	<ul style="list-style-type: none"> • 4800 W maximum output power (48 V systems) • 24 and 48 V nominal battery voltage • 600 V max. PV array open circuit voltage • Compatible with XW Pro and SW
	865-1034	Conext™ MPPT 100 600 Charge Controller	<ul style="list-style-type: none"> • 6000 W maximum output power (48 V systems) • 24 and 48 V nominal battery voltage • 600 V max. PV array open circuit voltage • Compatible with XW Pro and SW
	865-1036	MPPT Disconnect RS	<ul style="list-style-type: none"> • Accessory for MPPT 60/80/100 charge controllers for NEC 2017 compliance • PV disconnect, rapid shutdown transmitter, and arc fault detection (UL1699B)
	865-1039	RS Initiator Switch	<ul style="list-style-type: none"> • Outdoor rated initiator switch for the MPPT Disconnect RS

Insight Energy Management solutions for residential and commercial applications

Local and remote monitoring



Insight is a powerful yet simple energy management platform and is a part of Schneider Electric's residential and commercial solar & storage ecosystem. It provides intuitive mobile and web-browser based interfaces for homeowners and installers alike.

Residential applications



Residential grid-tie solar with battery backup



Residential self-consumption with storage



Residential off-grid



Residential backup power

Commercial applications



Commercial rooftop solar for self-consumption with storage



Commercial backup power



Commercial off-grid



Microgrids



Telecom towers

3

Insight and edge devices

Insight

Insight brings intuitive monitoring and control to both homeowners and commercial site operators as well as solar installers. Rich features such as monitoring, reporting, and remote control ensure that everyone can access critical system information when you need it from anywhere at any time.



Description

- Advanced data security. Compliance with international cybersecurity standards.
- Access from anywhere at any time
- Available through local, cloud, and mobile interfaces
- Performance monitoring, reporting, and report control of your system
- Multi-site management

3

Edge devices

Our edge devices connect customers' Schneider Electric solar and storage systems to the Insight app. InsightHome targets the residential solar and storage market globally. InsightFacility is for large residential and commercial solar and storage systems.

	Part number	Product name	Description
	865-0329	Conext™ Gateway	<ul style="list-style-type: none"> • Compatible with XW Pro, SW and Conext™ accessories • Supports Xanbus, Canbus, and Modbus for connectivity to range of SE solar products • Supports Wi-Fi and Ethernet for easy connectivity
	865-0330	InsightHome	<ul style="list-style-type: none"> • Compatible with XW Pro, SW and Conext™ accessories • Supports Xanbus, Canbus, and Modbus for connectivity to range of SE solar products • Support up to 25.5 kW of storage
	865-0335	InsightFacility	<ul style="list-style-type: none"> • Compatible with XW Pro, SW and Conext™ accessories • Supports Xanbus, Canbus, and Modbus for connectivity to range of SE solar products • Support up to 50 kW of storage



Download Insight mobile app that helps you stay on top of your energy



Broad range of balance of systems for residential and commercial applications

Power Distribution Panels, Charge Controllers and Accessories



We offer broad range of balance of systems that are compatible with our storage inverter / chargers and monitoring solutions.

Leverage Schneider Electric's ecosystem of products and solutions.

Residential applications



Residential grid-tie solar with battery backup



Residential self-consumption with storage



Residential off-grid



Residential backup power

4

Commercial applications



Commercial rooftop solar for self-consumption with storage



Commercial backup power



Commercial off-grid



Microgrids



Telecom towers

Power Distribution Panels (PDP)

PDP and PDP accessories for XW Pro systems

The XW PDP and Mini PDP are factory-wired and labeled to support the integration of multiple XW Pro hybrid inverters and MPPT solar charge controllers with a single battery bank.

	Part number	Product name	Description
	865-1013-01	XW Mini PDP	<ul style="list-style-type: none"> • Power distribution panel accessory for single XW Pro inverter systems • Includes three AC breakers • 250 A DC breaker for inverter/charger connection to battery
	865-1015-01	XW PDP	<ul style="list-style-type: none"> • Power distribution panel accessory for single, 2 or 3 unit XW Pro inverter systems • Includes three AC breakers • 250 A DC breaker for inverter/charger connection to battery
	865-1014-01	XW PDP (No AC circuit breakers)	<ul style="list-style-type: none"> • Power distribution panel accessory for single, 2 or 3 unit XW Pro inverter systems • 250 A DC breaker for inverter/charger connection to battery
	865-1020-02	XW Inverter Connection Kit	<ul style="list-style-type: none"> • Connection kit for connecting a second or third XW inverter to the XW PDP • Includes a conduit box, a 250 A DC breaker, and wiring
	865-1025-01	XW Conduit Box	<ul style="list-style-type: none"> • Conduit box for XW series inverters • Wiring accessories not included
	865-1215-01	120/240Vac Breaker Kit for XW PDP	<ul style="list-style-type: none"> • XW PDP accessory for additional XW inverters, single-phase/split-phase • Includes three 60A, 120/240 Vac AC breakers
	865-1315-01	3 Phase Breaker Kit for XW PDP	<ul style="list-style-type: none"> • XW PDP accessory for additional XW inverters, three-phase • Three 60A, 120/208 Vac AC breakers

Please refer to XW Pro and XW PDP datasheets for more information.

Power Distribution Panels (PDP)

PDP and PDP accessories for SW systems

The SW Power Distribution Panels are pre-wired out of the box and labeled to support the integration of SW inverter / chargers with a MPPT Solar Charge Controller, battery bank and load centers. Designed to save installers significant time, effort and costs on every installation, the Distribution Panels offer excellent value when compared to customized options.

The solution set includes a DC distribution panel complete with a pre-installed 250 A DC breaker and additional breaker slots for integrating multiple DC power sources.

	Part number	Product name	Description
	865-1016	SW DC Breaker Panel	<ul style="list-style-type: none"> DC Breaker panel accessory for SW series inverters 250 A DC Breaker for inverter/charger connection to battery
	865-1017	SW AC Breaker Panel 120/240 V	<ul style="list-style-type: none"> AC breaker panel accessory for SW series inverters Includes two 30 A AC breakers and one 60 A AC breaker

DC breaker accessories for XW Pro and SW systems

	Part number	Product name	Description
	865-DCBRK-250	250A, 160VDC, Panel Mount DC Breaker	• XW / SW PDP accessory for inverter/charger connection to battery
	865-DCBRK-125	125A, 125VDC, Panel Mount DC Breaker	• XW / SW PDP accessory for MPPT 100 600 connection to battery
	865-DCBRK-100	100A, 125VDC, Panel Mount DC Breaker	• XW / SW PDP accessory for MPPT 80 600 connection to battery
	865-DCBRK-80	80A, 125VDC, Panel Mount DC Breaker	• XW / SW PDP accessory for MPPT 60 150 connection to battery
	865-DCBRK-60	60A, 160VDC, Panel Mount DC Breaker	• XW / SW PDP accessory for MPPT 60 150 input connection to PV array. Not used when the MPPT 60 150 is installed with MPPT Disconnect RS

Accessories

Accessories for XW Pro and SW systems

	Part number	Product name	Description
	865-1155-01	Conext™ Configuration Tool	<ul style="list-style-type: none"> • PC-based software tool to simplify system configuration and reduce installation time • Compatible with XW Pro, and SW, as well as MPPT charge controllers
	865-1050-01	Conext™ System Control Panel (SCP)	<ul style="list-style-type: none"> • Control panel to set up and monitor the inverter charger system
	865-1060-01	Conext™ Automatic Generator Start (AGS)	<ul style="list-style-type: none"> • Automatically activate or stop a generator in response to changing power requirements • Compatible with XW Pro and SW, as well as MPPT charge controllers
	865-1080-01	Conext™ Battery Monitor	<ul style="list-style-type: none"> • Indicates hours of battery based runtime and determines battery bank state of charge • Compatible with XW Pro and SW, as well as MPPT charge controllers

System Configurations / Bill of Materials



AC- and DC-Coupled systems using XW series storage inverters


Flexible, ultimate backup power performance

The XW series inverters paired with MPPT charge controllers will provide ultimate backup performance while keeping flexible configurations. Our solutions are suitable for both AC-Coupling and DC-Coupling.

AC-Coupling

AC-Coupling is a great option if your customer's goal is retrofitting the existing PV system with a storage solution, or the loads coincide with PV generation. Our XW series inverters are compatible with third-party inverters and microinverters.

AC-Coupling Configuration Example

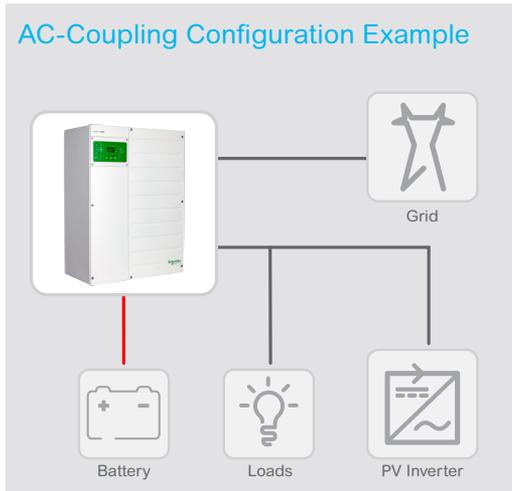


5

Read more about AC Coupling vs DC-Coupling

Learn advantages and disadvantages of each approach in Tech Notes. See Page 32.

DC-Coupling

Prioritize storage of solar energy for later use with DC-Coupling. DC-Coupling is also suitable for prolonged blackouts. If the battery inverter shuts down due to discharged battery and no PV, the system automatically recovers through DC charging when PV returns).

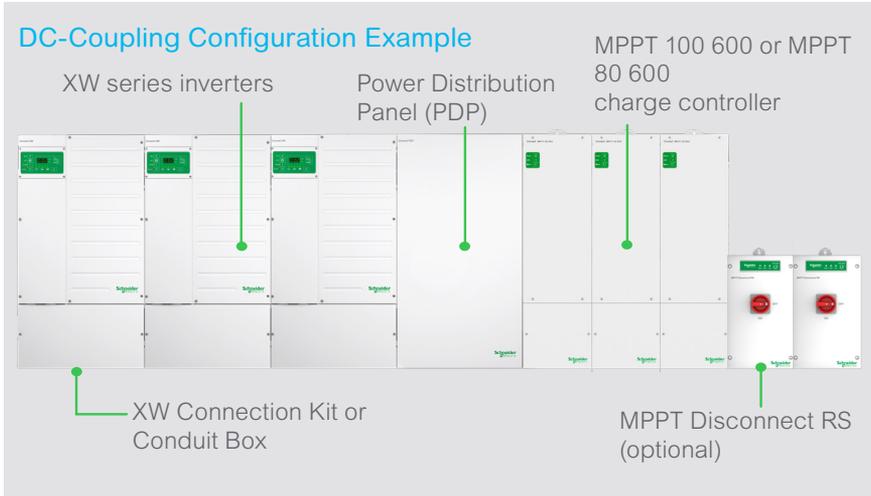

Example system configurations for each system size

In the following pages, we show example ordering information for some typical configurations. Other configurations are also possible such as adding additional MPPT charge controllers. Please refer to each product's specifications and manuals for more information.

Residential 120/240 V Split Phase Example System

	Part Number	Solar w/ 8.5 kW Storage	Solar w/ 17 kW Storage	Solar w/ 25.5 kW Storage
Storage inverters				
XW Pro	865-6848-21	1	2	3
Charge Controller Solutions for DC-Coupling ¹				
MPPT 100 600 or MPPT 80 600 or MPPT 60 150	865-1034 or 865-1032 or 865-1030-1	1	2	3
Optional: MPPT Disconnect RS	865-1036 and 865-1039	1 1	1 1	2 1
Power Distribution Panels				
XW Mini PDP	865-1013-01	1	-	-
XW PDP with AC Breakers	865-1015-01	-	1	1
XW Connection Kit	865-1020-02	-	1	2
60A 120/240 VAC Breaker Kit	865-1215-01	-	1	1
Charge Controller Output Breaker	Refer to DC breaker accessories	1	2	3
Optional: Extra AC Breakers for Generator Integration	Refer to AC breaker accessories	One 2-pole	Two 2-pole	Three 2-pole
Manual Bypass		Included	Note 2	Note 3
Monitoring and Control				
Insight Home or Insight Facility	865-0330 or 865-0335	1	1	1
Optional Accessories				
Automatic Generator Start	865-1060-01	1	1	1
Battery Monitor	865-1080-01	1	1	1

¹ Additional charge controllers also require an additional charge controller output breaker. XW series inverters are also compatible with AC coupled PV inverters.

² Included with 865-1215-01

³ Installed externally (not included)

Three Phase Example System

	Part Number	Solar w/ 25.5 kW Storage
Storage inverters		
XW Pro	865-6848-21	3
Charge Controller Solutions for DC-Coupling ¹		
MPPT 100 600 or MPPT 80 600	865-1034 or 865-1032	3
Optional: MPPT Disconnect RS	865-1036 and 865-1039	2 1
Power Distribution Panels		
XW PDP without AC Breakers	865-1014-01	1
XW Connection Kit	865-1020-02	2
60A Three Phase Breaker Kit	865-1315-01	1
Charge Controller Output Breaker	Refer to DC breaker accessories	3
Optional: Extra AC Breakers for Generator Integration	Refer to AC breaker accessories	One 3-pole
Manual Bypass		Included with 865-1315-01
Monitoring and Control		
Insight Home or Insight Facility	865-0330 or 865-0335	1
Optional Accessories		
Automatic Generator Start	865-1060-01	1
Battery Monitor	865-1080-01	1


¹ Additional charge controllers also require an additional charge controller output breaker. XW series inverters are also compatible with AC coupled PV inverters.

DC-Coupled systems using SW hybrid inverter/charger

Proven hybrid inverter solution

The SW inverter paired with MPPT charge controllers is perfect for off-grid, backup power and self-consumption applications for small home systems.

For expanded off-grid capacity, SW can be integrated with generators. It's also self-consumption ready, able to prioritize solar consumption over the grid while maintaining zero grid export. The SW works with the grid to avoid peak utility charges and support the grid when utility supply is limited.

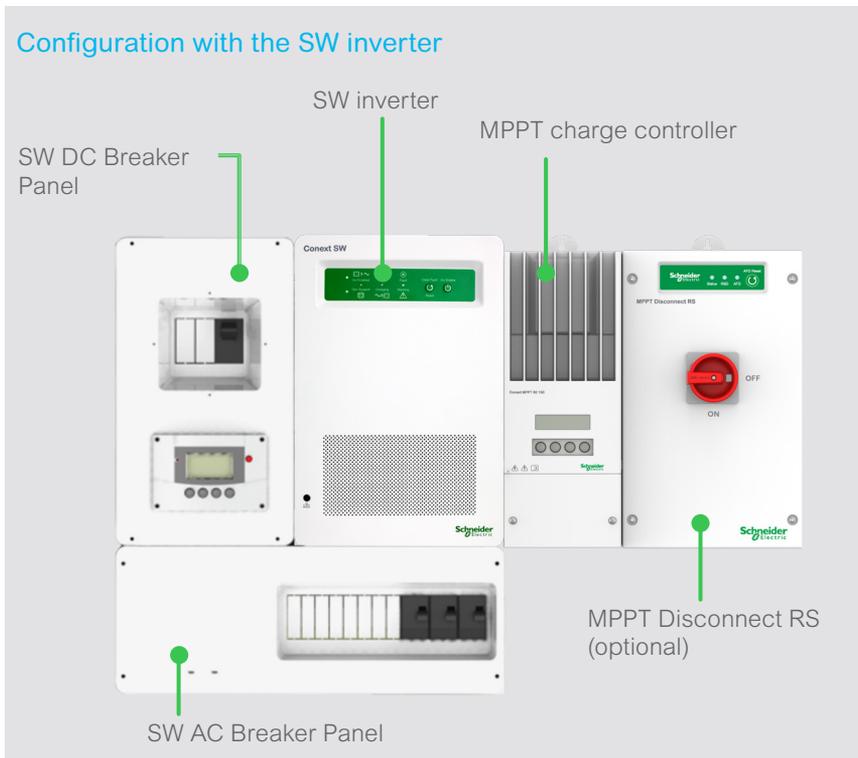

Example system configuration

The following table shows example ordering information for some typical configurations. Please refer to each product's specifications and manuals for more information.

	Part Number	Solar w/ up to 4.4 kW Storage
Inverters and Charge Controller Solutions		
SW	865-4048 or 865-4024	1
MPPT 100 600 or MPPT 80 600 or MPPT 60 150	865-1034 or 865-1032 or 865-1030-1	1
Optional: MPPT Disconnect RS ¹	865-1036 and 865-1039	1 1
Power Distribution Panels		
SW DC Breaker Panel	865-1016	1
SW AC Breaker Panel 120/240V	865-1017	1
Charge Controller Output Breaker	Refer to DC breaker accessories	1
Optional: Extra AC transfer switch		Note 2
Monitoring and Control		
Insight Home or Insight Facility	865-0330 or 865-0335	1
Optional Accessories		
Automatic Generator Start	865-1060-01	1
Battery Monitor	865-1080-01	1

¹ If MPPT Disconnect RS is not used, PV disconnect is also required.

² If 2 AC sources are used, an external transfer switch would be required.

Tech Notes



Benefits of SW / XW Pro Enhanced Grid Support feature

Summary: Schneider Electric's SW/ XW Pro Battery Inverter products are designed for maximum flexibility and can be integrated with PV generators on the or AC output (Load side) or DC side (Battery side). These two methods of connecting PV generators and storage inverters are commonly referred to as AC and DC coupling respectively. SW and XW series inverters support both methods of PV integration. For more on this application, see our Tech note on AC & DC Coupling.

Enhanced Grid Support is Schneider Electric's proprietary control algorithm for energy management and is based on Schneider's patent US8076907B2.


This feature is designed to maximize energy storage when DC coupling is used with Schneider Electric's battery inverters and charge controllers. The feature requires communication between the battery inverter and DC charge controller and therefore only works with Schneider Electric's solar and storage products.

Enhanced Grid Support (EGS) applies to grid connected systems, for applications where the battery inverter is used for back-up or to maximize self-consumption. When EGS is active, the battery inverter and charge controller interact continuously during Bulk, Absorption and Float stages of charging. Through the charging stages, the system intelligently exports the excess PV power not stored by the battery, while adjusting to the charge voltage settings of the charge controller.


Why is unique about this?

1. The Charge controller(s) are able to execute a full two or three stage charge cycle, to optimally charge the battery. This allows the battery to be charged at a charging voltage associated with each charge stage (Bulk, Absorption, Float) and efficiently returns the battery to a full state of charge. For flooded batteries, the elevated battery voltage during Absorption stage promotes agitation of electrolyte which reduces stratification of the acid.
2. In most other DC coupled systems, a fixed voltage is used to regulate battery charging and excess PV export. The fixed charging voltage is likely to result in partial state of charge of the battery and could degrade battery performance over time

Bulk stage

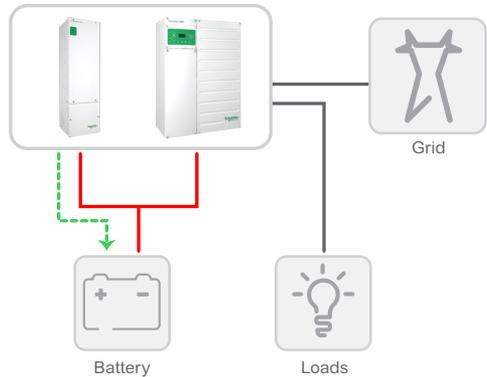

Absorption stage

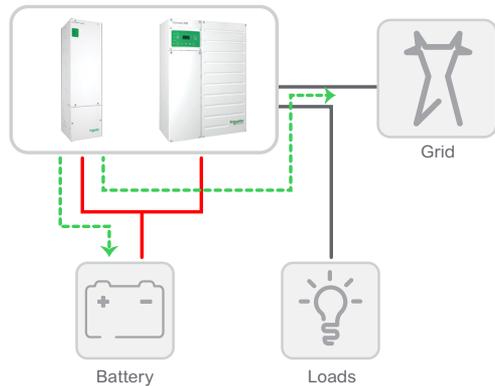


Just like Smart Charge for AC Coupled systems, Enhanced Grid Support is designed to maximize and prioritize storage loads. The value of this feature is that the stored energy can be used later when rates are higher (Time-of-Use). Or in applications where the grid is intermittent, EGS prioritizes storage of your PV production to maximize readiness for potential grid outage.

NOTE: Enhanced Grid Support is not compatible with lithium-ion batteries with BMS integration due to the need for closed loop control communication with BMS in the lithium-based battery. To achieve Enhanced Grid Support functionally with BMS integration, **InsightHome** or **InsightFacility** needs to be installed in the system.

For more information on enhanced grid support feature, refer to respective product manuals.

Float stage

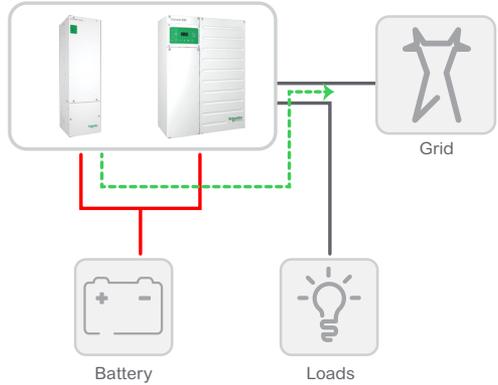

6

Using Lithium-ion & Advanced Batteries with Our Hybrid Inverters & Charge Controllers


Summary: Lithium-ion batteries continue to increase in popularity due to improved affordability, superior cycle life and longevity compared to traditional lead acid batteries. However, Lithium batteries require controlled charging and discharging for optimal and safe operation which necessitates changes to traditional battery charging algorithms to adapt to the chemistry's sensitivities. The XW and SW series inverters now support operation with lithium batteries to increase your options for storage technology.

The XW, SW and MPPT charge controller family of products can be used with Smart Lithium-ion Batteries. Smart batteries have an internal Battery Management System (BMS) that monitors critical internal parameters and determines safe charging or discharging parameters.

InsightHome and **InsightFacility** retrieve the relevant charging and discharging parameters from the battery BMS and intelligently controls operation of the XW/ SW inverter and charge controller system accordingly. This type

of control is known as closed loop control and allows Schneider Electric solar and storage system to adapt to battery BMS operating limits, warnings and in real time. It is also possible to use your Schneider Electric Solar product with Lithium batteries that do not rely on communication with the inverter. Such lithium batteries are referred to as Lead Acid replacements.

For information on supported lithium battery models, please contact your battery manufacturer or Schneider Electric application engineers.

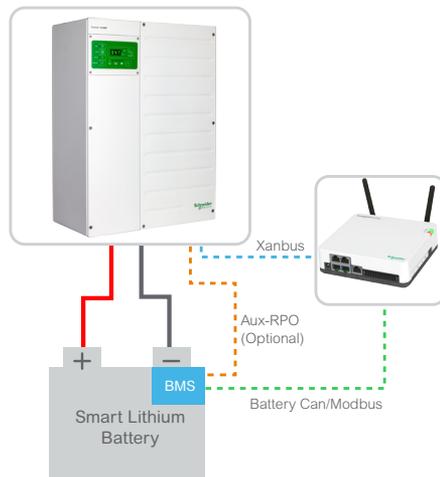

Lithium-ion battery with closed loop control

Benefits of SW Smart Charge Feature

Summary: As utilities struggle with excess generation from distributed PV, a phenomenon commonly known as the “duck curve”, storage is becoming a key component of a long-term solution. Through incentive programs, end users are being encouraged to add storage and store excess PV during peak generation (mid-day) periods, for use during peak demand hours (early evening), e.g. Time-of-Use rates. For existing PV installations, this means adding storage as a retrofit. Smart charge facilitates easy time of use by automatically storing excess generation from your existing PV inverter system.

Smart Charge is Schneider Electric's proprietary control algorithm and is based on Schneider Electric's patent US9917446B2.

This feature is designed to maximize energy storage in AC coupled systems. The feature does not require any communication between the battery inverter and PV Inverter, and thus works with any brand of PV Inverter.

For the feature to work, the PV inverter must be installed downstream of the SW inverter, or to the AC Output port of the inverter which would typically also connect to a critical load panel. This feature is used for grid connected systems, where the storage inverter is used for back-up or to maximize self-consumption.

When smart charge is active, the battery inverter monitors the flow of excess PV power produced by the PV inverter flowing in through the AC Load terminal and out to the grid port. The battery inverter intelligently captures the excess PV power and re-directs it to charge the battery. As the battery approaches full charge, excess PV power that cannot be stored by the battery is allowed to flow out to




SW inverter

the inverter grid input port and support other loads in the home or for eventual export to the grid where allowed.

Just like Enhanced Grid Support for DC coupled systems, Smart Charge is intended to maximize and prioritize storage over non-critical loads in AC coupled systems. The added value of this feature is that the stored energy can be used later when rates are higher (Time-of-Use). In applications where the grid is intermittent, Smart Charge prioritizes storage of your excess PV production to maximize readiness for potential grid outage.

For more on Smart Charge feature, refer to the respective product manual.

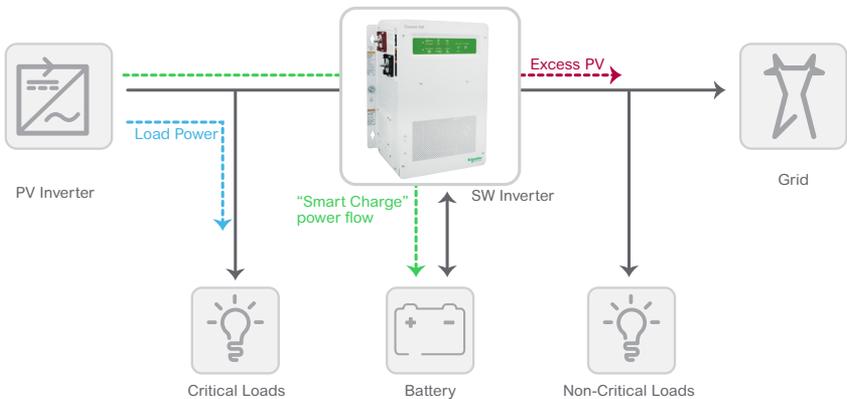

Smart Charge automatic power flow


Getting the most out of XW Pro Auxiliary Control Port

Summary: Schneider Electric's XW product line is designed for maximum flexibility. A useful feature is the Auxiliary port (Aux Port). This is a 5-position terminal block located at the lower right side of the inverter and is software configurable to perform several functions.

The Aux port can be used to control other devices based on certain conditions in the system. Some uses include the following applications.

1. Large installations using multiple inverters.
 - For large three phase systems with 3 or more inverters, the Aux port is used to control an external transfer or disconnect switch to switch the loads between the XW systems and an alternate AC source (grid or generator).
 - For stacked single phase systems, the port can be used to control an external load switch when loads in the system exceed 60A. This avoids damage to XW's internal transfer relays when used with large loads in a stacked system.
2. Load shedding: Can be used to disconnect a non-critical load based on battery state of charge to prolong autonomy in back-up mode. An external relay is required.
3. Simple AGS control: Can be used to start/stop a two-wire generator based on battery voltage or State of Charge.
4. Battery Cabinet venting: Can be used to control a fan in a battery cabinet. Programmable to start the fan at a specific battery voltage or charge stage (e.g. bulk exit) and stop at completion of Absorption Phase.
5. Outdoor cabinet cooling fan: Can be used to activate a cabinet cooling fan based on internal temperature of the XW. This can be used if the XW is installed in a cabinet that is exposed to high ambient temperature but has a cabinet cooling fan.
6. Time of Use Load shedding: Can be used to disconnect non-critical loads in the home during a high tariff period (e.g. ToU).

Note: In each of the above applications, an appropriately rated external relay must be used to switch each respective load.

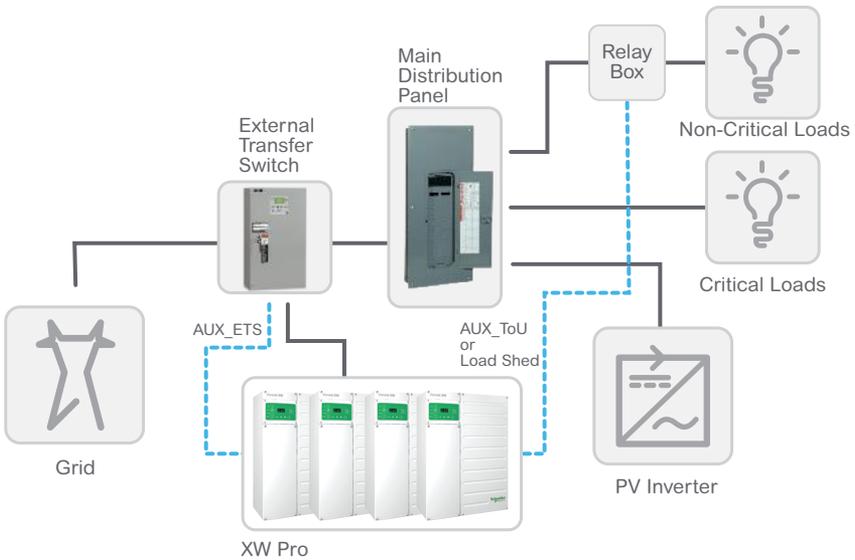

Example: External transfer and load shedding applications using XW Pro Aux in a system.

AC Coupling vs DC Coupling

Summary: AC or DC coupling refers to how power from Solar panels connects or couples with power from a battery inverter. It can connect on the battery inverter's AC output terminals (AC coupling) or to the battery side (DC coupling).

The question of which of the two approaches is better has been debated at length among solar installers and system integrators. Each approach has its advantages and disadvantages which depend on the needs of an application. One analogy is that of vehicle propulsion options, front vs rear drive vs all-wheel drive. The choice depends on use case, e.g. whether for city driving or racing or off-road driving.

Here are some pros and cons of each approach:


AC Coupling

Pros:

- More efficient if loads coincide with PV generation (e.g. commercial building, offices).
- Easier to retrofit storage.

Cons:


- Lacks black start capability. (If battery inverter shuts down due to discharged battery and no PV, system will not recover when PV returns).
- There are constraints on AC coupled PV system sizing in comparison to the power rating of the battery inverters.

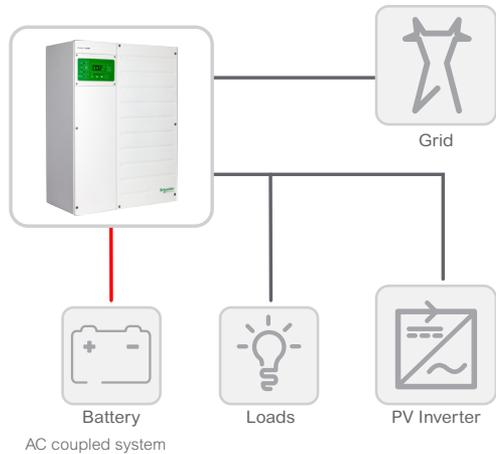

DC Coupling

Pros:

- More efficient if prioritizing storage of PV for later use (e.g. residential, off-grid communities)
- Battery inverter is sized to match the load.
- Supports black start. If the battery inverter shuts down due to discharged battery and no PV, the system automatically recovers through DC charging when PV returns).

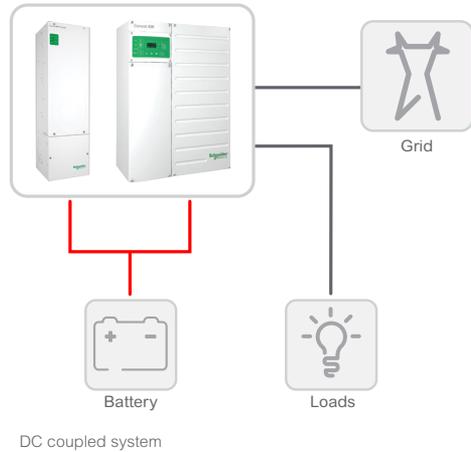

Cons:

- PV inverter must be replaced with charge controller for retrofit systems.
- Less efficient if loads are coincident with PV generation.

Five Steps to Sizing The Solution You Need

When sizing any solar and storage system it is important to always work backwards – understand the load you want to run. Understand when you want to run it (day or night) and for how long. Based on this, the design engineer can select the inverters, the PV array sizing and size the battery bank (or storage).

Step


1

Load Profile

Always start here. Understand how much power your system needs to provide at its highest point in demand and also understand how many kWh of power needs to be produced on a daily basis.

Also determine how much energy needs to be stored in kWh for night time usage daily.

Three things to determine:

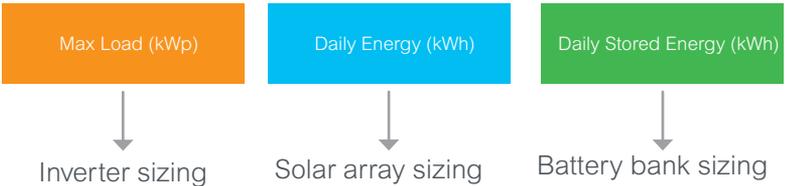

6

Step

2

Inverter Sizing

Once the maximum instantaneous power of a given site is determined, we know what the peak power rating of our inverters should be.

It is also important to make sure that all the critical loads can be run for enough time. Be aware of the inverters capabilities over time and at different temperature ranges.

Step

3

Solar Array Sizing

It is sized based on daily kWh and whether grid export is allowed. Decide AC coupling or DC coupling or both.

1. Size the array that will fulfill your daytime consumption requirements. For larger systems this will typically be installed on grid tied inverters (AC Coupled).
2. Size the array that will charge your batteries for night time usage. For most systems this will be installed on charge controllers (DC Coupled).

Step

4

Battery Bank Sizing

Depending on the weather conditions where your installation is taking place, nighttime consumption of your system and the storage technology suited for you site, it is recommended that the battery bank be sized with a reasonable oversizing factor to ensure uninterrupted supply of power.

Battery bank sizing should take into account the system use case such as self-consumption or time-of-use rate optimization. It may as consider the household critical loads and desired number of hours of autonomy in case of a grid failure.

Step

5

Back-up Power Sources

If you are installing a system in an area with extended periods of bad weather or very heavy loads that only run occasionally you may need to install a backup generator or get a grid connection to ensure that you have the excess power available.

Work closely with your installer to understand this, simply installing a generator for emergency or exceptional conditions can drastically reduce what you need to spend on your overall system.

6

Using Two Generators with XW Pro

Summary: The XW Pro multi-mode inverters offer a broad flexibility to accommodate your application needs. Some off-grid installations (e.g. remote hospitals, resorts, etc), use multiple energy sources to increase autonomy and maximize resiliency. One solution is the use of two generators to add redundancy.

The XW Pro is a perfect solution for redundant generator application. The two AC inputs on the XW can be used to manage the two AC sources. Two Conext™ AGSs will also have to be installed in the system to control the generators. To setup the system, stagger the following configuration settings:

- Select a primary generator and configure the start/stop triggers on the associated Conext™ AGS as appropriate.
- On the back up AGS, set the start/stop configuration settings slightly lower than on chosen for the primary AGS.



XW Pro hybrid inverter

6

Once installed and configured, simply select the primary running generator by configuring the “AC source priority” parameter on the Master in the XW System. The primary generator will always start first since trigger settings are higher. If the primary generator does not start for any reason (e.g. out of fuel) the battery voltage or battery State of Charge (SoC) will continue to drop. Eventually the trigger conditions for the second AGS will be met and the back-up generator will start.

Li-ion Compatibility



Blue Planet Energy



Integration with Schneider Electric

Blue Planet Energy has megawatt-hours of fielded energy storage systems coupled with Schneider Electric hybrid inverters and solar charge controllers. These systems power grid-independent residences in off-grid and non-export energy markets, as well as commercial installations that provide business continuity, resilience, and financial savings. As part of an American Red Cross resilience project, Blue Planet Energy and Schneider Electric power more than 100 emergency shelters in schools located throughout Puerto Rico.

Blue Ion 2.0 integrates seamlessly with Schneider Electric power conversion equipment. The open-loop communication configuration requires a single voltage setpoint. Blue Ion's high-power BMU optimizes battery charging down to the cell-pack level, while providing best-in-class online system performance monitoring. Together, Schneider Electric and Blue Planet Energy offer integrators a field-proven solution for durable, high-performance solar energy storage projects

Designed, assembled, and tested in Hawaii by Blue Planet Energy, Blue Ion is a best-in-class energy storage system that provides unparalleled safety, reliability, and performance. Our company, design process, and craftsmanship are guided by Aloha, a Hawaiian principle that encompasses love, patience, attention, kindness, respect, and a connection to nature.

Website

BluePlanetenergy.com

Contact

Sales@BluePlanetEnergy.com

866.957.2246

Product Highlights

Blue Ion 2.0 is precisely engineered to offer simple, fast, and repeatable design and installation. It offers the safety of Lithium Ferrous Phosphate (LFP), the confidence of a 15-year performance warranty, and the durability of 100% depth of discharge with no impact on cycle life. Every Blue Ion system you install is backed by the coolest and most experienced team in energy storage.

Listed to UL 9540, Blue Ion 2.0 is available with configurable energy capacities of 8 kWh, 12 kWh, and 16 kWh. Integrators can parallel units for a maximum system capacity of 448 kWh. Blue ion 2.0 has a continuous power rating of 8 kW and surges to 10 kW for 30 minutes and 17 kW for one second. It supports AC- and DC-coupled system topologies as well as seamless integration with 3-phase services.

7

Discover AES LiFePO₄ Batteries

Integration with Schneider Electric

Discover AES LiFePO₄ batteries are built for demanding off-grid, whole home backup and microgrid applications. Discover AES batteries offer 1C continuous charge / discharge capabilities for the fastest recharge possible and support 3C peak output to handle in-rush and starting loads. They are field serviceable and have a 10-year replacement warranty. Each battery has an independent Battery Management System (BMS) that can be networked with up to 20 Discover AES batteries in parallel (133 kWh) and will communicate directly with the world's leading hybrid inverter systems.

Discover AES batteries are Xanbus devices for easy, plug-and-play integration with Schneider Electric hybrid inverters or direct connection with **InsightHome** or **InsightFacility**. Closed-loop communication provides real-time battery data/status reporting over the Xanbus network and enables the internal BMS to automatically set, optimize and dynamically manage the charge and discharge configuration of Schneider Electric hybrid inverters. Dynamic charge control offers up to 25% improvement in 0% to 100% SoC recharge time compared to open loop control.

Product Highlights

Discover AES LiFePO₄ 6.65 kWh

- p/n 42-48-6650
- Useful 6.65 kWh (130 Ah) 100% DoD
- Nominal: 51.2 V
- Continuous Discharge / Charge: 130 A (each)
- Peak Current: 300 A (each)
- Communication: Xanbus, CAN, Modbus TCP / IP
- Parallel: Up to 20 batteries per network string
- IEC 62133, UL 1973, UN 38.3

Discover AES LiFePO₄ 2.8 kWh

- p/n 44-24-2800
- Useful 2.8 kWh (110 Ah) 100% DoD
- Nominal: 25.6 V
- Continuous Discharge / Charge: 110 A (each)
- Peak Current: 300 A (each)
- Communication: Xanbus, CAN, Modbus TCP / IP
- Parallel: Up to 20 batteries per network string
- IEC 62133, UL 1973, UN 38.3

This page in no way constitutes an endorsement, express or implied, of any product, service, or company.

Discover[®]
Innovative Battery Solutions

Discover Battery is a leader in energy storage innovation for solar, transportation and motive applications. Our battery brands include AES LiFePO₄, Advanced Tubular, MIXTECH, Gel Cell and Dry Cell.

Discover Battery is a Canadian company headquartered in Vancouver, BC with offices and distribution around the world and multiple manufacturing facilities located in Asia.

Website

discoverbattery.com/solar

Contact

solarsales@discoverbattery.com

Fortress Power

Integration with Schneider Electric

Fortress Power deploys self-managed Battery Management System (BMS) which can be easily integrated into Schneider Electric equipment. Using open loop control, the installer simply configures the battery charging and discharging parameters (high and low cut off voltage, max. charging and discharging current, etc.) via **InsightHome** or **InsightFacility**.

The Fortress eVault 18.5 has CAN and RS 485 ports for communication.

Product Highlights

eVault 18.5: 48V, 360AH, total energy 18.5kWh, max. 12 units in parallel for 222kWh; CAN/RS 485 communication

eFlex 5.4: 48V, 105 AH, total energy 5.4 kWh, max 15 units in parallel; CAN/RS 485 communication

LFP-10: 48V, 100AH, total energy 10 kWh, max 2 in parallel; no communication

LFP-5K-48V: 48V, 100AH, total energy 5kWh, max 2 in parallel; no communication

LFP-5K-24V: 24V, 200AH, total energy 5kWh, max 2 in parallel; no communication



Fortress Power is a Pennsylvania-based global leader in lithium battery manufacturing that focuses on helping solar installers use the safest and most reliable energy storage for their projects.

Fortress Lithium Iron Phosphate Battery has industry-leading technology with a Battery Management System that integrates multilevel safety concepts for best reliability.

The High-Performance Fortress Lithium Battery is easy to install, safe, long lasting and super-efficient. It provides a low lifetime energy cost for both new solar customers and retrofit customers.

Website

www.fortresspower.com

Contact

sales@fortresspower.com

Tel: +1 (877) 497 6937

Fax: +1 (267) 988 4219

Pylontech



Integration with Schneider Electric

Pylontech batteries are set up for BMS communication with Schneider Electric's XW Pro and **InsightHome/ InsightFacility**. The Pylontech batteries operate with closed-loop control with the XW Pro inverter, using the **InsightHome/ InsightFacility** as the CAN interface with the BMS.

Product Highlights

US2000:

- 48V nominal
- 50Ah, 2.4 kWh
- Up to 8 battery packs in parallel, expandable with LV-Hub
- CAN, RS485 communication



US3000:

- 48 V nominal
- 74 Ah, 3.552 kWh
- Up to 8 battery packs in parallel, expandable with LV-Hub
- CAN, RS485 communication



LV-Hub

- Connect up to 5 battery piles
- Each battery pile can configure maximum 8 pcs US2000 or US3000



Pylontech is a unique manufacturer of lithium batteries with vertical integration from cell to module integration with its own BMS for different ESS application. With self-developed key technologies and dedication to ESS applications, Pylontech has delivered over 1.6GWh of batteries for the global ESS market since 2013.

Pylontech is proudly contributing our strength in changing the way people generating, transferring and using the electricity.

Website

www.pylontech.com.cn

Contact

Commercial: Rita.ping@pylontech.com.cn

Technical: Spenser.cheung@pylontech.com.cn

SimpliPhi Power

Integration with Schneider Electric



SimpliPhi's entire line of non-hazardous LFP PHI batteries have been successfully integrated with Schneider Electric inverters worldwide for nearly a decade in a diverse range of on- and off-grid residential, commercial and microgrid applications.

SimpliPhi also offers its all-in-one AccESS Energy Storage System featuring 3 or 4 PHI 3.8 kWh batteries with the XW Pro 6848, with both AC Coupled or DC Coupled options, prewired in a NEMA-3R-rated cabinet. The Rule 21 compliant AccESS with Schneider Electric is ideal for backup power, TOU, peak-shaving, and self-consumption of solar, and UPS functions.



7

PHI Battery Product Features

- Up to 100% DoD and 98% efficiency
- 10-year, 10,000-cycle warranty
- LFP battery chemistry free of cobalt hazards — no risk of overheating, fire, fumes or off-gassing
- No thermal monitoring, fire suppression, cooling or ventilation equipment required
- Indoor and outdoor use in all climates
- Modular and scalable
- Can install in small or unique spaces
- Full range of capacity and voltage options



SimpliPhi Power designs and manufactures efficient, non-toxic and enduring energy storage and management systems that utilize lithium ferro phosphate (LFP) battery chemistry. Based in Oxnard, California, SimpliPhi combines the nonhazardous LFP chemistry with its proprietary cell and battery architecture, power electronics, Battery Management System (BMS) and manufacturing processes to create safe, reliable, durable and highly scalable on-demand power solutions for residential, commercial and emergency response applications. Integral to all SimpliPhi solutions is a proprietary management system that further optimizes the lifecycle, efficiency, overall performance and durability of its batteries. SimpliPhi storage system components are UL certified and have been rigorously tested and passed requirements by the U.S. Army and Marine Corps.

Website

simpliphipower.com/

Contact

sales@simpliphipower.com

This page in no way constitutes an endorsement, express or implied, of any product, service, or company.



Register Schneider Electric
solar products at
[SEsolar.com/registration](https://www.se.com/na/en/solar/products/registration)
for free extended warranty

NEC 2017 Compliance

Schneider Electric's hybrid solar and storage solutions now offer enhanced flexibility to meet NEC 2017 requirements with both DC coupled and AC coupled PV arrays. For DC coupled arrays with the Conext™ MPPT 60 150, MPPT 80 600, or MPPT 100 600 charge controllers, Schneider Electric offers the MPPT Disconnect RS accessory, providing an easy to install solution for rapid shutdown PV arrays and NEC 2017 compliance. Schneider Electric inverter / chargers can also be AC coupled with string inverters or micro-inverters from third parties.

DC Coupling using MPPT Disconnect RS and Charge Controllers

The MPPT Disconnect RS pairs with the Conext™ MPPT 60 150, MPPT 80 600 and MPPT 100 600 providing a rapid shutdown transmitter, arc fault detection, and a PV disconnect.

Simplified NEC 2017 Compliance with the MPPT Disconnect RS

- Integrated Rapid Shutdown transmitter using power line communication (PLC)
- Tested and certified with Tigo TS4-F range of Fire Safety receivers
- Arc fault detection certified to UL1699B
- Compatible with Conext™ MPPT 100 600, MPPT 80 600, and MPPT 150 charge controllers



Integrated PV Disconnect

- 2 leg disconnect, compliant with NEC 2017
- LOTO capability
- 2 input channels with up to 2 strings per channel

Flexible Installation

- Each MPPT Disconnect RS can pair with up to two MPPT 80/100 or one MPPT 60
- Single Rapid Shutdown Initiator Switch for larger systems
- Side or bottom cable entry
- Mount on either side of the Conext™ MPPT charge controllers

Charge Controller Configurations with the MPPT Disconnect RS



MPPT 100/80 600 with MPPT Disconnect RS

2 Strings



Qty 2 MPPT 100/80 600 with MPPT Disconnect RS

2 Strings x 2 Channels



MPPT 60 150 with MPPT Disconnect RS


4 Strings
(2 Strings per Channel)

AC Coupling

The XW and SW series inverters can be used in AC coupled configurations with various 3rd party string inverters and micro-inverters. This gives installers maximum flexibility to select AC coupled or DC coupled architectures. For NEC 2017 compliant AC coupled PV arrays, micro-inverters can be used, as well as string inverters with a certified rapid shutdown system.

Refer to the AC Coupled Solutions Guide (976-0240-01-01) for more information on AC coupled inverter compatibility and system sizing guidelines.

Example AC coupled architecture with micro-inverters

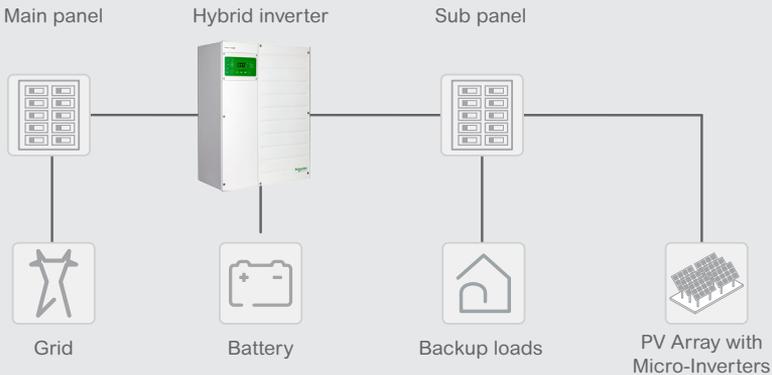

Customer Success Stories



“The village is now able to access to electricity 24 hours from our Minigrid - where they used to have only 4 hours per day.

I would like to thank Schneider Electric for their supports and commitments throughout the project.”

— Barani Aung, Managing Director of
Techno-Hill Engineering

Learn more at [SEsolar.com/myanmar](https://www.sesolar.com/myanmar)

North and South America

● Commercial application ● Residential application



California, USA
Off-grid solar



Ontario, Canada
Off-grid solar



Vermont, USA
Residential off-grid
Homeowner in VT gains energy independence from the grid

Solution: multi-cluster off-grid system including XW+ inverter / chargers, MPPT 80 600 charge controllers and compatible batteries



Hawaii, USA



Puerto Rico
Microgrids
100 schools are powered by Microgrids through Red Cross's community resiliency project

Solution: microgrids using XW+ inverter / chargers, MPPT 60/80 charge controllers and other communication devices.

Learn more at SEsolar.com/red-cross



Argentina
Microgrid

Europe, Middle East and Africa

● Commercial application ● Residential application



Germany
Commercial rooftop



Finland
Commercial rooftop



Finland
Commercial rooftop



UK
Commercial rooftop



France
Commercial rooftop



Spain
Off-grid solar



Nigeria
Commercial off-grid

170 schools and 11 healthcare centers throughout Lagos State powered by solar
Solution: XW+ inverter / chargers with the online monitoring solution

Learn more at
SEsolar.com/nigeria



Nigeria
Microgrids



Ukraine
Commercial rooftop



Egypt
PV plant



South Africa
Residential off-grid

One Everton - A South African flagship for community energy independence

Solution: centralized storage solution using nine XW+ inverters

Learn more at
SEsolar.com/one-everton

Asia Pacific

● Commercial application ● Residential application



**Myanmar
Microgrids**

Powering a remote fishing and farming village in Kenti island

Solution: microgrid solution using six XW+ inverter / chargers with 14 MPPT 60 charge controllers that are connected to 288,000 Ah battery bank.

Learn more at SEsolar.com/myanmar



Philippines Telecom Tower



Indonesia

Electrification of 60 remote villages across Indonesian islands

Learn more at SEsolar.com/indonesia



Indonesia Off-grid solar



Australia Battery storage solution



Australia

3-Phase solar + storage system

Living independently and resiliently off grid

Solution: solar and storage system using XW Pro inverters and MPPT 80 charge controllers.



New Zealand

Residential off-grid

Portable all-in-one energy supply alternatives in New Zealand

Solution: solar battery system using three XW+ inverters, four MPPT 80 charge controllers, and the monitoring solution. The battery bank was composed of eight Li-ion batteries.

Learn more at SEsolar.com/new-zealand

Life Is On

Schneider
Electric

Schneider Electric Solar Inverter US
8100 S Akron St
Ste 300
Englewood, CO 80112