



MATE3

Advanced System Display and Controller

- Program, Manage and Monitor Entire System
- Intuitive Menu Structure
- Easy-To-Read Graphical Display
- System Configuration Wizard
- Internet Enabled
- Field Upgradable
- Up to 1-Year of Data Logging
- SD Memory Card Slot



The MATE3 System Display and Controller make it easier than ever to program and monitor a complete OutBack Power system. An intuitive user interface and integrated system configuration wizard make system setup and programming quick and seamless. The ability to set unique multi-level user passwords makes it possible to secure critical system settings from unintended changes while still allowing open access to necessary functions.

Other features making system management simpler include an easy-to-read graphical backlit LCD display, improved tactile buttons, and user programmable "favorite" keys for immediate access to the most wanted features. An intuitive scroll wheel interface allows easy adjustment of system set points. Expandable SD card memory increases data logging capacity as well as making it easy to upgrade units in the field.


A built-in clock and calendar function enables timer-based programming of inverter and charger operation. This setting allows the system to work with time-of-day power rates or to limit a generator's run time to a specific time period of the day or week. All settings are stored in on-board memory to eliminate the need to reprogram in the event of a system shutdown or battery replacement. The MATE3 supports web-server access via an intranet to allow monitoring of an OutBack system.

OutBack
POWER™
member of The  Group™

www.outbackpower.com

MATE3 Specifications

Display	4.0 x 1.2" full graphical display
Quick System Access	5 system operation hot keys, 4 user programmable soft keys
Status Indicators	Nine LED Navigational Controls
Navigational Controls	5 navigational keys
Setpoint Adjustment	Touch sensitive scroll wheel
Communication Protocol	Proprietary OutBack Communications Protocol
Interconnection Cabling Included	Standard CAT5 network cable with RJ45 modular jack - 6' (2 m)
PC Computer Interface	HTML system status dashboard over local intranet connection
Field Update Capability	Yes (includes Radian inverters, FLEXmax Extreme charge controller and MATE3)
Microprocessor	80 MHz 32 bit processor
Set Point and Data Memory	8 Mb RAM/ 64 Mb of flash RAM
Clock/Calendar	On-board real time clock with battery backup
Operating Temperature Range	0°C to 50°C
Environmental Rating	Indoor Type 1 (IP 30)
Maximum Cable Length	300' (100 m)
Optional Accessories	MATE3 USB card
Warranty	Standard 5 year Warranty
Weight	Unit: 1.4 lbs (0.64 kg) Shipping: 3.0 lbs (1.36 kg)
Dimensions H x W x D	7.1 x 7.5 x 1.6" (18 x 19 x 4.1 cm)

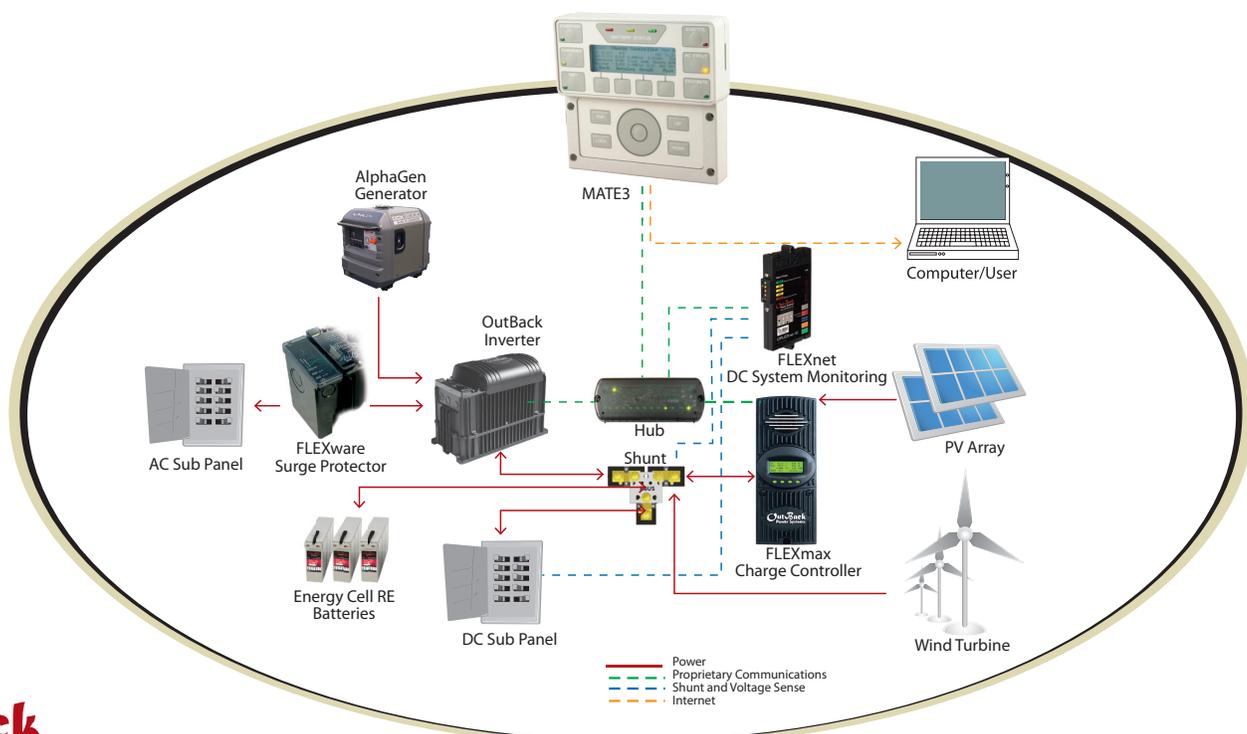

Corporate Office:
5917 195th St. NE
Arlington, WA 98223 USA
Phone: (360) 435 6030
Fax: (360) 435 6019

European Office:
Hansastraße 8
D-91126
Schwabach, Germany
Phone: +49 9122 79889 0
Fax: +49 9122 79889 21

Asia Office:
Suite 1903, Tower 1, China Hong Kong City
33 Canton Road, Kowloon
Hong Kong
Phone: +852 2736 8663
Fax: +852 2199 7988

Latin American Office:
15105 Cedar Bluff Pl.
Wellington, FL 33414 USA
Phone: (561) 792 9651
Fax: (561) 792 7157