



ME-ARC | REMOTE CONTROL

ADVANCED FEATURE REMOTE CONTROL

Introduction

This advanced feature remote offers the same simple push button operation of the ME-RC with advanced features and setup menus. The ME-ARC features a Favs button for storing up to five of your favorite setup menus, a Control button for fast easy control of the inverter, charger, and generator, meter button with AC and DC meters, advanced setup menus, and advanced tech menus.



Features

- Large LCD screen.
- Quick access menus via a dial.
- Programmable readings.
- Non-volatile memory.
- Favs button for storing your favorite setup menus.
- Basic control of Magnum Energy brand inverter/chargers.
- Working with the ME-AGS-N Auto Gen Start, the ME-ARC provides advanced control of generators.
- Battery monitoring control when paired with the ME-BMK.
- Battery Profile Presets: If using the ME-ARC Remote Control with MS Series, MSH-M Series, MSH-RV Series, or MMS Series inverter/chargers, easily choose from and set standard battery profiles, including Gel, Flooded, AGM1, and AGM2.

Included in the Box


- Remote
- ME-RC-BZ Bezel
- 50' Cable

Model Numbers

- ME-ARC50

Works With

- ME Series
- MM Series
- MM-AE Series
- MM-E Series
- MMS Series
- MMS-E Series
- MS Series
- MSH-M Series
- MSH-RE Series
- MSH-RV Series
- MS-AEJ Series
- MS-E Series
- MS-PAE Series
- MS-PE Series
- RD Series
- RD-E Series

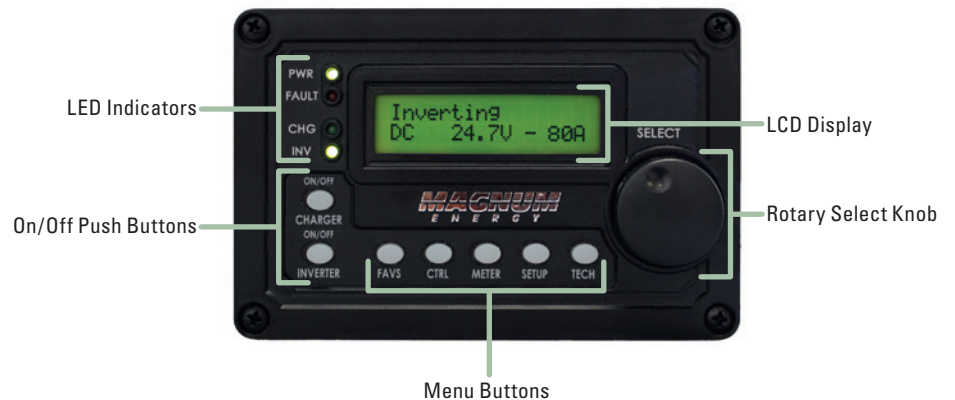

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

651-653-7000
800-553-6418
InverterInfo@sensata.com

Power Conversion
www.magnum-dimensions.com