FRANKLINWH

aPower S

Complete solar and battery system

The aPower S is a battery storage device with integrated inverters to support a direct connection to solar (PV) panels. The front wiring design makes installation easier and more efficient.

The aPower S also supports parallel AC-coupled connection with FranklinWH aPower 2 batteries to expand power and capacity for homes at the same time. It can be flexibly deployed according to customer requirements. Excellent load adaptability provides the best backup experience to users.

aPower S has a 15 kWh capacity, which can provide whole home backup with a single battery. It provides a 60 MWh throughput or 15-year warranty, helping users to easily achieve reliable energy independence and freedom over the long term.

- Four built-in MPPTs
- 15 A per MPPT
- RTE 90.5%
- Safer LFP battery cell chemistry
- Built-in hybrid inverter
- 15 kWh per unit, up to 225 kWh (15 units) per aGate
- 11.5 kW continuous / 15 kW peak for 10 seconds
- Built-in heating blanket ensures reliable cold-weather performance down to -4° F (-20° C)
- Stable operations in extreme heat up to 131° F (55° C)
- IP67 weather protection

PERFORMANCE SPECIFICATIONS

Name	aPower S
SKU	APRS-10K15V1-US
Nameplate Model	aPower S-10
Certification / CEC Listing Name	aPower Syyy
Battery Chemistry	Lithium Iron Phosphate (LFP)
Usable System Energy	15 kWh[1] per unit, up to 15 units per aGate
Aggregate Warrantied Throughput	60 MWh
Real Power (Charge)	8 kW continuous (on-grid/off-grid)
Real Power (Discharge)	11.5 kW[2] / 11.5 KVA continuous (on-grid/off-grid)
Nominal AC Voltage	120 / 240 V, 120 / 208 V (single phase), 60 Hz
Grid Voltage Range	211 ~264 Vac; 183 V~228 Vac
Coupling	Hybrid-Coupled, DC-Coupled PV input, AC-Coupled with the FranklinWH System
Phase	2 W+N+PE

Round Trip Efficiency (Grid – Battery – Load)	90.5%[1]
Solar to Home/Grid Efficiency	98%[3]
Maximum Short-Circuit Current Rating	10 kA
Work Modes	Self-Consumption Time of Use Emergency Backup
Noise Emission	30 dBA Typical 45 dBA Maximum
Flood Resistance (IP67)	Up to 29" from the aPower S base
AC Metering	Revenue Grade (+/- 0.5%, ANSI C12.20)
User Interface	FranklinWH App
Warranty[4]	15 years or 60 MWH throughput

Solar Technical Specifications

Maximum Solar STC Input	20 kW
Withstand Voltage	600 Vdc
PV DC Input Voltage Range	60 - 550 Vdc
PV DC MPPT Voltage Range	90 - 480 Vdc

MPPTs	4
Maximum Current per MPPT (Imp)	15 A
Maximum Short Circuit Current per MPPT (Isc)	20 A

PERFORMANCE SPECIFICATIONS

Grid-Tied Specifications

Nominal Output Power (AC)	5 kW	7.6 kW	9.6 kW	11.5 kW[2]
Maximum Apparent Power	5 kVA	7.6 kVA	9.6 kVA	11.5 kVA
Maximum Continuous Current	21 A	32 A	40 A	48 A
Overcurrent Protection Device	30 A	40 A	50 A	60 A
Programmable Power Factor Setting				0 ~ ±1

Off-Grid Specifications[5]

THDU	< 1%
Voltage Regulation Accuracy	±1%
Frequency Accuracy	±0.1 Hz
Half-Wave Load Capability	5 kW
Peak Output Power	15 kW @ 10 S
Transient load capacity	25 kW @ 1 S
Load Imbalance Ratio	100%
Load Start Capability	185 A LRA

COMPLIANCE INFORMATION

Certifications	UL9540; UL9540A; UL1973; UL1741; UL1741 SB; UL1741 PCS; UL1699B; UL1998; UN38.3; IEEE 1547; IEEE 1547.1; CSA 22.2 No.107.1;
Seismic	AC 156, OSHPD, IEEE 693-2005 (high)
Environmental	California Proposition 65
Emissions	FCC Part 15 Class B, ICES 003

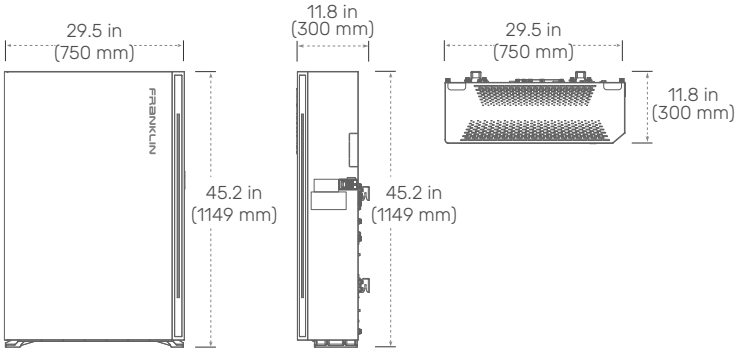

MECHANICAL SPECIFICATIONS

Dimensions (H × W × D)	45.2 in × 29.5 in × 11.8 in (1149 mm × 750 mm × 300 mm)
Weight, aPower S complete	381 lbs (173 kg)
Weight, without Cover	358 lbs (162.5 kG)
Mounting	Wall or floor mount
Cooling	Natural air-cooled design

ENVIRONMENTAL SPECIFICATIONS

Enclosure Type	Type 3R
Ingress Protection	IP56 (Wiring) IP67 (Battery Pack & Inverter)
Operating Temperature	-4 °F to 122 °F (-20 °C to 50 °C) Operates up to 131 °F (55 °C) at 5kW derated output
Operating Humidity (RH)	Up to 100% RH, condensing
Altitude	Maximum 9,843 ft (3,000 m)
Environment	Indoor and outdoor rated

1. At beginning of life: 3 kW charge/discharge power, 77° F (25° C).
2. When both PV and battery are supplying power, the system can deliver a continuous AC output of up to 11.5 kW. With battery-only input, the continuous AC output is 10 kW.
3. Tested in accordance with the CEC-weighted efficiency approach.
4. For more details, please refer to the FranklinWH System Limited Warranty for End Users available in the Documentation Center on the FranklinWH website.
5. The output performance is designed with reference to IEC 62040-3 (Uninterruptible Power Systems – Part 3: Method of specifying the performance and test requirements. A number of core indicators meet the requirements of high-performance UPS.

Note:
At launch, the aPower S will only be compatible with external RSD transmitter products. It is certified and listed as a Photovoltaic Rapid Shutdown System (PVRSS) when installed with approved equipment. For a list of compatible devices and installation requirements, please refer to the Documentation Center or contact engineering@franklinwh.com.

The aPower S (SKU: APRS-10K15V1-US) is available in the United States and Canada. For product availability in other regions, please visit our official website or contact a local authorized dealer.

Address: 1731 Technology Dr., Suite 530 San Jose, CA 95110 **Telephone:** +1 888-837-2655 **Email:** info@franklinwh.com **Website:** www.franklinwh.com

Copyright 2025 FranklinWH Energy Storage Inc. All rights reserved. The Franklin logo, FranklinWH, and other trademarks or service names are the trademarks of FranklinWH Energy Storage Inc.
The document is for informational purposes only, data subject to change. 2025-07-23